



FD4-P / FDP4-P

Price Computing Scale




FD4-P / FDP4-P

Price Computing Scale

Feature:

- High speed 24bits AD; Display reading speed faster
- Faster weighing stability & faster zero return
- Zero key and Tare key react faster
- Digital calibration
- Vendor and customer sides LCD displays with LED backlight
- Energy-efficient switching power supply adapts to different power source voltages (AC 100V~240V)
- Built-in rechargeable battery; auto power-off battery protection circuitry
- Low power and charging status indication
- LCD display full tare (Weight-6 digits, Unit Price-6 digits, Total Price-6 digits)
- Water channel designed underneath the platter to give a better protection against water running into the scale
- Unique sealing rings designed to prevent dust, dirt, cockroaches and water from entering the scale, thereby improving reliability and hygiene
- Special design for power switch prevents moisture getting inside the scale for better performance stability and reliability
- Special sunken power coil outlet design to prevent water running into the socket to improve safety and reliability
- Easily adjusted leveling feet for stability of the scale
- Other available models:
FD4-P-6PS / FDP4-P-6PS: 6 direct PLU + 80 indirect PLU
FDP4-P-35: 35 direct PLU
- 1/3,000 display resolution or 1/6,000 display resolution available
- Money change
- Kilogram (kg) and pound (lb) weighing modes
- Up to 99 data accumulations and 25 data recalls

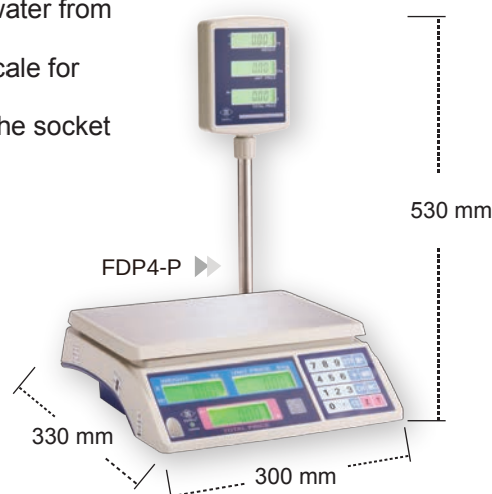

Option:

- RS232 or serial printer output

Specifications:

Model	Capacity	Division	Resolution
FD4-P / FDP4-P -3	3 kg (6 lb)	1 g (0.002 lb)	1/3,000
FD4-P / FDP4-P -6	6 kg (12 lb)	2 g (0.005 lb)	1/3,000
FD4-P / FDP4-P -15	15 kg (30 lb)	5 g (0.01 lb)	1/3,000
FD4-P / FDP4-P -30	30 kg (60 lb)	10 g (0.02 lb)	1/3,000
FD4-P-6PS / FDP4-P-6PS -3	3 kg (6 lb)	1 g (0.002 lb)	1/3,000
FD4-P-6PS / FDP4-P-6PS -6	6 kg (12 lb)	2 g (0.005 lb)	1/3,000
FD4-P-6PS / FDP4-P-6PS -15	15 kg (30 lb)	5 g (0.01 lb)	1/3,000
FD4-P-6PS / FDP4-P-6PS -30	30 kg (60 lb)	10 g (0.02 lb)	1/3,000

Operating Temperature: -10°C ~ 40°C (14°F ~ 104°F)

Power Source: AC 100V~240V ±10% + DC 6V/4Ah rechargeable battery

Dimensions: FD4-P: 300 x 110 x 330 mm (W x H x D); FDP4-P: 300 x 530 x 330 mm (W x H x D)

Platter Size: 280 x 230 mm (W x D)

Display: LCD. 6, 6, 6 digits, Height 14mm, LED backlight (Vendor side for standard)



EXCELL PRECISION CO., LTD.

6F, No.127, Lane 235, Baoqiao Rd., Xindian Dist., New Taipei City 23145, Taiwan

Tel: +886-2-89191000

Website: www.excell-scale.com

Fax: +886-2-89191177

E-mail: pm-all@excell.com.tw